



# LANCASTER

## WATER TREATMENT

*Est. 1942*

# POINT-OF-USE PACKAGE

## CLEAR-FLO

### Prevent Staining & Build-Up


Filters treat water to protect pipes, faucets, water heaters, boilers, and other appliances that require the use of water. As a result, water stains are eliminated, and the water system will remain clear to maintain functionality.

### Chemical Free Water Filtration

Utilizing physical filtering media to collect water contaminants rather than using chemicals to alter the contaminants within the water allows the system to provide your home with safe and healthy water.

### Space Saving

We understand that homes come in all shapes and sizes. To ensure that we provide you with the best fit for your home, we offer these space saving cartridge filtration options.

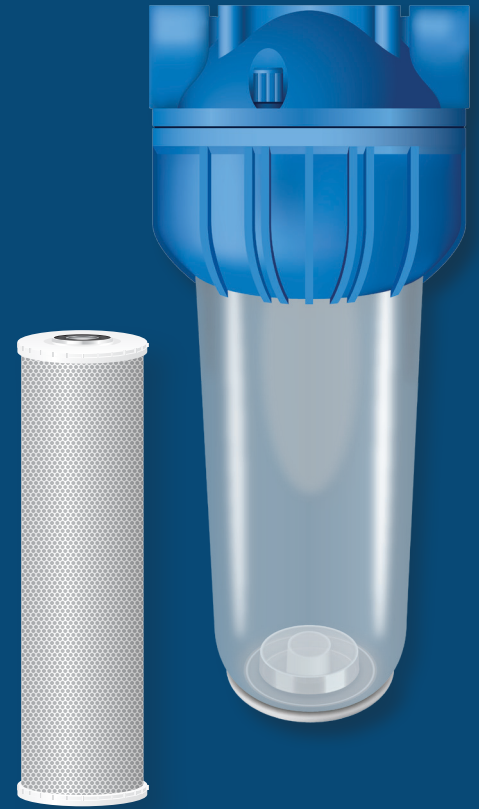

**EASY  
SET-UP**



**SIMPLIFIED  
MAINTENANCE**



**BROAD  
SOLUTION RANGE**



**CONTAMINANT  
REMOVAL**

# CLEAR-FLO POINT-OF-USE FILTER

OUR CLEAR-FLO POINT-OF-USE FILTER REDUCES CONTAMINANTS THAT NEGATIVELY IMPACT THE COLOR, TASTE, AND ODOR OF WATER.

## HOW IT WORKS:

1. Untreated water enters the Clear-Flo Point-of-Use Filter Housing.
2. The water flows through the activated carbon block cartridge that filters sediment and reduces chlorine, volatile organic compounds, and heavy metals.
3. Treated water enters your home free of color, taste, and odor altering organics.
4. The Clear-Flo Point-of-Use Filter continuously removes contaminants to incoming water while properly maintained.



## APPLICATIONS:

- Replaces expensive grocery store POU and Refrigerator filters
- Ultra-sediment filtration
- Polishes water at pot fillers, bar sinks, and kitchen sink

MODEL NUMBER	SERVICE FLOW RATE (GPM)	PIPE SIZE (IN.)	DIMENSIONS HxW (IN.)	MICRON	TREATMENT
210-POU-05-P	8	3/4	12.40 x 5.24	0.5	Removes fine sediment Reduces chlorine, VOC, and heavy metals

\*Dimensions for estimating purposes

\*\* Package includes wrench, bracket, and lubrication kit

## Operating Parameters:

SERVICE TIME	Avg. 6 mths. – Cartridge, Max. 5yrs – Housing Sump
TEMPERATURE	Min. 39.2°F - Max. 113°F
PRESSURE	Max. 120 PSI
OTHER CONSIDERATIONS	Other equipment may be needed based on water quality.